


COMPARISON

Intimidator™ 19XPC > VERMEER AX19

THE BANDIT SLIDE BOX FEED SYSTEM

allows the top feed wheel to move straight up and down, providing direct down pressure on material entering the chipper using down pressure springs and the standard hydraulic lift cylinder. Whereas, the Vermeer pivot arm system utilizes a pivoting top feed wheel that moves up and down on an arc away from the chipping drum. There is little direct down pressure, limiting pulling and compressing power causing more chainsaw work and decreased production.

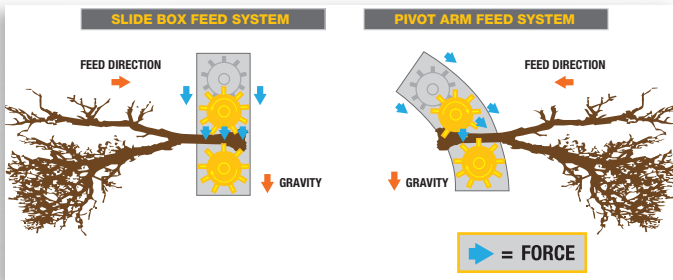

SMOOTH FEEDING

the reversing auto feed system on the 19XPC is programmed to work in conjunction with the engine's RPM's creating a smooth efficient chipping action. The Vermeer Smart Feed is designed to reverse the feed system on a frequent basis creating increased vibration, reduced feeding efficiency and chip quality.

THE INTIMIDATOR 19XPC DOWN PRESSURE

is an advantage over the AX19. The 19XPC has approximately 5,080 pounds of down pressure (660 pounds max with down pressure springs and 4,480 pounds with lift cylinder) compared to 4,000 pounds of down pressure on the AX19. The added down pressure further enhances the machines' ability to process limby material making the unit easier to feed while reducing chainsaw work.

VARIETY OF GAS & DIESEL ENGINE OPTIONS

are available on the 19XPC ranging from 165 to 225 horsepower. The Vermeer AX19 is currently listed as only being available with a John Deere 173 horsepower engine.

CAN BE KEPT UNDER 10,000 POUNDS

with a gas engine and limited options. This set-up is on a single axle reducing the overall size of the unit. The AX19 is only offered on tandem axles and weighs a minimum of 11,000 pounds.



6750 MILLBROOK ROAD
REMUS, MICHIGAN 49340

1-800-952-0178

WWW.BANDITCHIPPERS.COM



All specifications, dimensions and options are subject to change without notice, and were current at the time of printing. Dimensions may vary, depending on options and engines selected. Bandit Industries, Inc. reserves the right to change designs, specifications and options without prior notice. © 2022 Bandit Industries, Inc. All Rights Reserved.

CALL YOUR LOCAL BANDIT SALES REPRESENTATIVE TO SCHEDULE A DEMONSTRATION TODAY!

MANUFACTURER:	BANDIT	VERMEER
Configuration:	Intimidator™ 19XPC	AX19
MEASUREMENTS		
Capacity:	19" diameter	19" diameter
Throat Opening:	20.875" wide x 20.5" tall	28.875" wide x 24" tall
Feed Rate (FPM):	100 FPM	119 FPM
DIMENSIONS		
Length (tray open):	20' 3"	18' 5"
Width:	7' 7"	6' 7"
Height:	8' 6"	9'
Weight:	9,800 -11,500 lbs.	11,200 – 11,650 lbs.
ENGINE		
Horsepower Range:	165 – 225 HP	173 HP
CHASSIS		
Frame:	2" x 6"	7.5" x .25"
Hitch:	2.5" Pintle	2.5" Pintle
Axle/Undercarriage:	(1) 12,000 lb. Axle	(2) 7,000 lb. Tandem Torsion
Tires/Tracks:	(2) 235/75R 17.5" Tires	LT285/75R 16" Tires
Tongue Jack:	8,000 lbs.	8,000 lbs.
FEED SYSTEM		
Type:	Slide Box	Pivot Arm
Down Pressure Springs:	(2) 21" Adjustable Springs	–
Feed Wheels:	(2) Horizontal	(2) Horizontal
Number of Hydraulic Motors:	2	4
Displacement (CID):	63.9	28.3
Infeed Hopper Dimensions:	33.75" high x 64" wide	35" high x 60.5" wide
Bottom Clean Out Door:	Standard	–

MANUFACTURER:	BANDIT	VERMEER
Configuration:	Intimidator™ 19XPC	AX19
CUTTING SYSTEM		
Style:	Drum	Drum
Disc/Drum Dimensions:	37" diameter x 22" width	36" diameter x 26.1" wide
RPM:	1,080	1,100
Knife Pockets:	4	4
Knives (thickness x width x length):	.625" thick x 5.5" wide x 10" long	.625" thick x 5" wide x 10" long
Chipper Shaft Diameter:	3.5"	–
Bearings:	(2) 2.9375"	(2) 2.5"
DISCHARGE		
Swivel:	345°	270°
Deflector:	Manual	Manual
TANKS		
Fuel Tank Capacity:	30-40 Gallon	40 Gallon
Hydraulic Tank Capacity:	30 Gallon	20 Gallon

BANDIT OFFERS A COMPLETE LINE OF TREE CARE EQUIPMENT:
 Hand-Fed Chippers • Stump Grinders • Whole Tree Chippers
 The Beast® Horizontal Grinders • Track Carriers • Attachments