


# COMPARISON

Bandit 15XPC > Morbark BVR16

## THE BANDIT SLIDE BOX FEED SYSTEM

allows the top feed wheel to move straight up and down providing direct down pressure on material entering the chipper by using down pressure springs and the hydraulic lift cylinder. The Morbark BVR chippers utilize a reverse pivoting feed system that moves up and down on an arc. Notice in the drawing below how the pressure is applied. The Bandit slide box feed will allow for greater pulling and compressing power reducing the need to trim or re-position material.

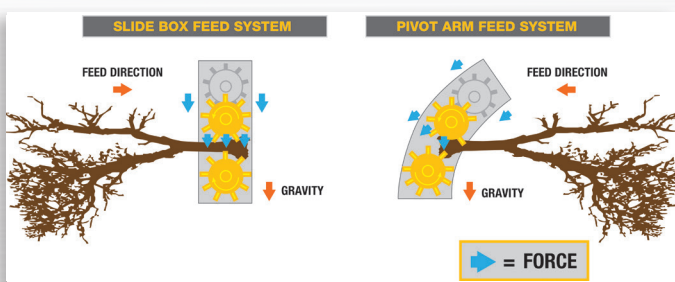

## DRUM ENGAGEMENT

The Bandit 15XPC is available with an NACD spring loaded or over center clutch to engage the drum. The spring-loaded clutch requires no adjustments to the pressure plates. Release levers rise to compensate for wear of the driven member. The Morbark BVR10 engages the drum utilizing a centrifugal clutch. Centrifugal clutches are known for slipping and are prone to heat issues. If slipping occurs, there are no actions that can occur to prevent damage. With an actual clutch, the operator has complete control and can disengage immediately if there is an issue.

## MINIMAL ELECTRONIC COMPONENTS

The new BVR line of Morbark chippers utilize more electronic components. Bandit chippers are engineered to use minimal electronic components for ease of service and less downtime.



6750 MILLBROOK ROAD  
REMUS, MICHIGAN 49340

**1-800-952-0178**

[WWW.BANDITCHIPPERS.COM](http://WWW.BANDITCHIPPERS.COM)



All specifications, dimensions and options are subject to change without notice, and were current at the time of printing. Dimensions may vary depending on options and engines selected. Bandit Industries, Inc. reserves the right to change designs, specifications and options without prior notice. © 2024 Bandit Industries, Inc. All Rights Reserved.

**CALL YOUR LOCAL BANDIT SALES REPRESENTATIVE TO SCHEDULE A DEMONSTRATION TODAY!**

MANUFACTURER:	BANDIT	MORBARK
Configuration:	15XPC	BVR16
MEASUREMENTS		
Throat Opening:	17 1/4" high x 18 5/8" wide	17" high x 25 3/8" wide
Feed Rate:	120 FPM	-
DIMENSIONS		
Length:	17' 6"	17' 11"
Width:	6' 9"	7' 1"
Height:	8' 2"	8' 8"
Weight:	7,500 lbs.	8,500 lbs.
ENGINE		
Horsepower Range:	74 – 165 HP	134 - 174 HP
CHASSIS		
Frame:	4" frame / 6" tongue (tubing)	6" Channel
Suspension:	8,000 lbs.	10,000 lbs.
Tires:	235 / 75R 17.5"	235 / 75R 17.5"
Hitch:	2 1/2" Pintle	2 1/2" Pintle
FEED SYSTEM		
Type:	Slide Box	Pivot Arm
Down Pressure Springs:	Springs / hydraulic Lift	Springs / hydraulic lift
Feed Wheels:	(2) Horizontal	(2) Horizontal
Displacement (CID):	(2) 32.3 CID	-
Infeed Hopper Dimensions:	30.75" high x 54" wide	34" high x 60" wide

MANUFACTURER:	BANDIT	MORBARK
Configuration:	15XPC	BVR16
CUTTING SYSTEM		
Style:	Drum	Drum
Disc/Drum Dimensions:	24" diameter x 18.75" width	24" diameter x 24.5" width
RPM:	1,530	-
Knife Pockets:	4	6
DISCHARGE		
Swivel:	360°	360°
Deflector:	Adjustable	Adjustable
TANKS		
Fuel Tank Capacity:	30 Gallon	30 Gallon
Hydraulic Tank Capacity:	12 Gallon	12 Gallon

**BANDIT OFFERS A COMPLETE LINE OF TREE CARE EQUIPMENT:**  
 Hand-Fed Chippers • Stump Grinders • Whole Tree Chippers  
 Horizontal Grinders • Attachments