

COMPARISON


Intimidator™ 12XP > Morbark 1415

THE BANDIT 12XP HAS A 24" DIAMETER DRUM

compared to the Morbark 21" diameter drum. The drum on the 12XP turns at 1,530 RPM compared to the 1415 drum turning at 2,250 RPM. A lower RPM drum delivers more torque, requires less horsepower, operates with less vibration and provides better fuel economy.

THE BANDIT SLIDE BOX FEED SYSTEM

allows the top feed wheel to move straight up and down, providing direct down pressure on material entering the chipper using down pressure springs and the standard hydraulic lift cylinder. Whereas, the Morbark pivot arm system utilizes a pivoting top feed wheel that moves up and down on an arc away from the chipping drum. There is little direct down pressure, limiting pulling and compressing power causing more chainsaw work and decreased production.

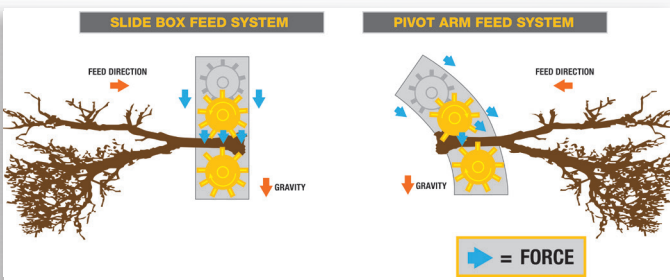

THE 12XP HAS FOUR KNIVES (FOUR CUTS PER REVOLUTION)


compared to the Morbark's two knife (two cuts per revolution) drum. With double the knives, there are more cuts per revolution and less distance in between the knives decreasing wood hitting against the drum. These combinations allow for a smoother more efficient chipping action with reduced vibration.

THE 12XP HAS AN APPROXIMATE FEED RATE OF 120 FPM

compared to the 80 FPM feed rate on the Morbark. The faster feed rate allows the 12XP to process material at a quicker rate.

THE INTIMIDATOR 12XP DOWN PRESSURE

is an advantage over the Morbark 1415. The 12xp has approximately 2,640 pounds of down pressure (440 pounds max with down pressure springs and 2,200 pounds with lift cylinder) compared to 1,500 pounds of down pressure on the 1415. The added down pressure further enhances the machines' ability to process limby material making the unit easier to feed while reducing chainsaw work.

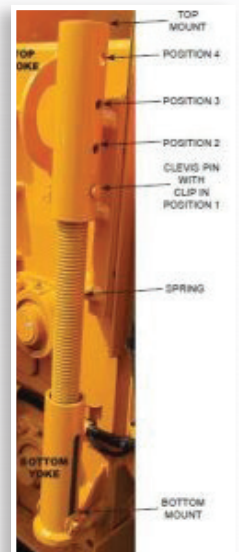

6750 MILLBROOK ROAD
REMUS, MICHIGAN 49340

1-800-952-0178

WWW.BANDITCHIPPERS.COM



All specifications, dimensions and options are subject to change without notice, and were current at the time of printing. Dimensions may vary depending on options and engines selected. Bandit Industries, Inc. reserves the right to change designs, specifications and options without prior notice. © 2024 Bandit Industries, Inc. All Rights Reserved.

CALL YOUR LOCAL BANDIT SALES REPRESENTATIVE TO SCHEDULE A DEMONSTRATION TODAY!

MANUFACTURER:	BANDIT	MORBARK
Configuration:	Intimidator™ 12XP	1415
MEASUREMENTS		
Capacity:	12" diameter	12" diameter
Throat Opening:	17" wide x 14.25" tall	15" wide x 14" tall
Feed Rate (FPM):	120 FPM	80 FPM
DIMENSIONS		
Length (tray open):	16'	15' 5"
Width:	6' 6"	5' 11"
Height:	8' 1"	8' 5"
Weight:	5,500 lbs.	5,500 lbs.
ENGINE		
Horsepower Range:	74 – 145 HP	70 – 145 HP
CHASSIS		
Frame:	3/16" x 4" Tubing	.25" x 6" Channel
Suspension:	7,000 lbs.	7,000 lbs.
Hitch:	2.5" Pintle	2.5" Pintle
Tires/Tracks:	ST235/80R 16" Tires	(2) 235/80R 16" Tires
Tongue Jack:	8,000 lbs.	5,000 lbs.
FEED SYSTEM		
Type:	Slide Box	Pivot Arm
Down Pressure:	Springs / Lift Cylinder, Max of 440 lbs. with Springs and 2,200 lbs. with Cylinder	Springs / Pivot Arm Cylinders
Feed Wheels:	(2) Horizontal	(2) Horizontal
Number of Hydraulic Motors:	2	2
Displacement (CID):	15.9	–
Infeed Hopper Dimensions:	30.75" high x 54" wide	31" high x 60" wide
Bottom Clean Out Door:	Standard	n/a

MANUFACTURER:	BANDIT	MORBARK
Configuration:	Intimidator™ 12XP	1415
CUTTING SYSTEM		
Style:	Drum	Drum
Disc/Drum Dimensions:	24" diameter x 18.75" width	21.4" diameter x 14.5" width
RPM:	1,530	2,250
Knife Pockets:	4	2
Knives (thickness x width x length):	.625" thick x 5.5" wide x 9" long	.5" thick x 5" wide x 10.5" long
Chipper Shaft Diameter:	3"	–
Bearings:	(2) 2.4375"	(2) 2.4375"
DISCHARGE		
Swivel:	360°	360°
Deflector:	Adjustable	Adjustable
TANKS		
Fuel Tank Capacity:	25 Gallon	24.5 Gallon
Hydraulic Tank Capacity:	12 Gallon	17 Gallon

BANDIT OFFERS A COMPLETE LINE OF TREE CARE EQUIPMENT:
 Hand-Fed Chippers • Stump Grinders • Whole Tree Chippers
 Horizontal Grinders • Attachments