COMPARISON


IntimidatorTM 12XP > Vermeer BC1200XL

DRUM EFFICIENCY

The Bandit drum has four knives and rotates at approximately 1,530 RPM's compared to the Vermeer two-knife drum rotating at 2,205 - 2,220 RPM. With double the knives, there are more cuts per revolution and less distance in between the knives decreasing wood hitting against the drum. Additionally, a slower rotating drum creates additional torque for maximum chipping efficiency. These combinations allow the Bandit to operate with less vibration and better fuel economy.

THE BANDIT SLIDE BOX FEED SYSTEM

Allows the top feed wheel to move straight up and down, providing direct down pressure on material entering the chipper using down pressure springs and the standard hydraulic lift cylinder reducing the need to trim and increasing productivity. Whereas, the Vermeer pivot arm system utilizes a pivoting top feed wheel that moves up and down on an arc away from the chipping drum. There is little direct down pressure, limiting pulling and compressing power causing more chainsaw work and decreased production.

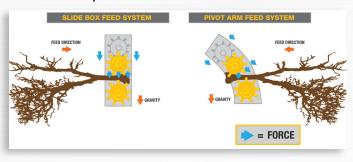

VARIETY OF ENGINE OPTIONS

Are available on the 12XP ranging from 74 to 145 horsepower (gas or diesel). The Vermeer BC1200XL is currently only offered with a Origin 115 horsepower gas engine.





SMOOTH FEEDING

The reversing auto feed system on the 12XP is programmed to work in conjunction with the engines RPM creating a smooth efficient chipping action. The Vermeer Smart Feed is designed to reverse the feed system on a frequent basis creating increased vibration, reduced feeding efficiency and chip quality.



6750 MILLBROOK ROAD **REMUS, MICHIGAN 49340** 1-800-952-0178 WWW.BANDITCHIPPERS.COM







MANUFACTURER:	BANDIT	VERMEER	
Configuration:	Intimidator™ 12XP	BC1200XL	
MEASUREMENTS			
Capacity:	12" diameter	13" diameter	
Throat Opening:	17" wide x 14.25" tall	17" wide x 13" tall	
Feed Rate (FPM):	120 FPM	110 FPM	
DIMENSIONS			
Length (tray open):	16'	17'	
Width:	6' 6"	6' 7"	
Height:	8' 1"	8' 5"	
Weight:	5,500 lbs.	5,680 lbs.	
	ENGINE		
Horsepower:	74 to 145 HP	115 HP Gas Only	
CHASSIS			
Frame:	3/16" x 4" Tubing	.25" x 7" Channel	
Suspension:	7,000 lbs.	7,000 lbs.	
Hitch:	2.5" Pintle	2.5" Pintle	
Tires/Tracks:	(2) ST235/80R 16" Tires	(2) ST235/80R 16" Tires	
Tongue Jack:	8,000 lbs.	5,000 lbs.	
	FEED SYSTEM		
Туре:	Slide Box	Pivot Arm	
Down Pressure:	Springs / Lift Cylinder, Max of 440 lbs. with Springs and 2,200 lbs. with Cylinder	Pivot Arm Cylinders, 2,650 lbs.	
Feed Wheels:	(2) Horizontal	(2) Horizontal	
Number of Hydraulic Motors:	2	2	
Displacement (CID):	15.9	-	
Infeed Hopper Dimensions:	30.75" high x 54" wide	32" high x 52" wide	
Bottom Clean Out Door:	Standard	n/a	

MANUFACTURER:	BANDIT	VERMEER	
Configuration:	Intimidator™ 12XP	BC1200XL	
CUTTING SYSTEM			
Style:	Drum	Drum	
Disc/Drum Dimensions:	24" diameter x 18.75" width	20" diameter x 20" width	
RPM:	1,530	2,000	
Knife Pockets:	4	2	
Knives (thickness x width x length):	.625" thick x 5.5" wide x 9" long	.625" thick x 4.5" wide x 9" long	
Chipper Shaft Diameter:	3"	-	
Bearings:	(2) 2.4375"	(2) 2.4375"	
	DISCHARGE		
Swivel:	360°	360°	
Deflector:	Adjustable	Adjustable	
TANKS			
Fuel Tank Capacity:	25 Gallon	25 Gallon	
Hydraulic Tank Capacity:	12 Gallon	12 Gallon	