

COMPARISON

Intimidator 15XP > Morbark 1621X

THE BANDIT 15XP HAS A 37" DIAMETER DRUM

compared to the Morbark 30" diameter drum. The drum on the 15XP turns at a slower RPM. A lower RPM drum delivers more torque, requires less horsepower, operates with less vibration and provides better fuel economy.


THE INTIMIDATOR 15XP FEED SYSTEM

is an advantage over the Morbark 1621X. The 15XP Slide Box springs allow for a max of 600 pounds of down pressure and the standard hydraulic lift cylinder generates another 3,480 pounds. The dual feed system generates another 4,840 pounds of pulling power. Morbark advertises the 1621X as having 3,400 pounds of pulling force and 1,500 pounds of down pressure. Based on this data, the 15XP has 1,440 more pounds of pulling power and 2,500 pounds more down pressure. These two combinations make the 15XP's feed system far superior compared to the 1621X Morbark.



THE BANDIT SLIDE BOX FEED SYSTEM

allows the top feed wheel to move straight up and down, providing direct down pressure on material entering the chipper using down pressure springs and the standard hydraulic lift cylinder. Whereas, the Morbark pivot arm system utilizes a pivoting top feed wheel that moves up and down on an arc away from the chipping drum. There is little direct down pressure, limiting pulling and compressing power causing more chainsaw work and decreased production.

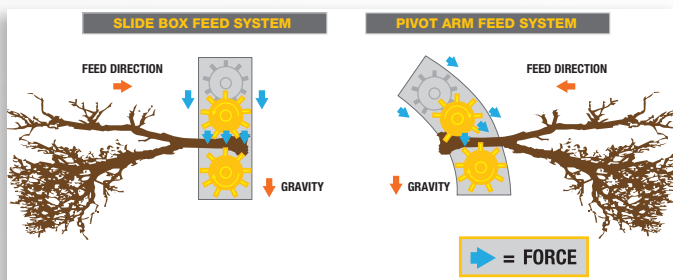

Bandit
EMPLOYEE-OWNED

6750 MILLBROOK ROAD
REMUS, MICHIGAN 49340

1-800-952-0178

WWW.BANDITCHIPPERS.COM



All specifications, dimensions and options are subject to change without notice, and were current at the time of printing. Dimensions may vary, depending on options and engines selected. Bandit Industries, Inc. reserves the right to change designs, specifications and options without prior notice. © 2022 Bandit Industries, Inc. All Rights Reserved.

CALL YOUR LOCAL BANDIT SALES REPRESENTATIVE TO SCHEDULE A DEMONSTRATION TODAY!

MANUFACTURER:	BANDIT	MORBARK
Configuration:	Intimidator™ 15XP	1621X
MEASUREMENTS		
Capacity:	15" diameter	–
Throat Opening:	18.25" wide x 17.75" tall	20.5" wide x 18" tall
Feed Rate (FPM):	120 FPM	100 FPM
DIMENSIONS		
Length (tray open):	17' 8"	18' 8"
Width:	6' 6"	7' 4"
Height:	8' 8"	8' 8"
Weight:	8,000 lbs.	8,900 lbs.
ENGINE		
Horsepower Range:	120 – 174 HP	140 or 145 HP
CHASSIS		
Frame:	.25" x 4" Tubing	.25" x 6" Channel
Suspension:	10,000 lbs.	9,000 lbs.
Hitch:	2.5" Pintle	2.5" Pintle
Tires/Tracks:	(2) 215/75R 17.5" Tires	(2) 235/75R 17.5" Tires or Track
Tongue Jack:	8,000 lbs.	10,000 lbs.
FEED SYSTEM		
Type:	Slide Box	Pivot Arm
Down Pressure Springs:	(2) 21" Adjustable Springs / Standard Lift Cylinder	Pivot Arm Springs / Hydraulic Down Pressure
Feed Wheels:	(2) Horizontal	(2) Horizontal
Number of Hydraulic Motors:	2	2
Displacement (CID):	32.3	32.3
Infeed Hopper Dimensions:	30.75" high x 54" wide	41" high x 59" wide
Bottom Clean Out Door:	Standard	–

MANUFACTURER:	BANDIT	MORBARK
Configuration:	Intimidator™ 15XP	1621X
CUTTING SYSTEM		
Style:	Drum	Drum
Disc/Drum Dimensions:	37" diameter x 18.75" width	30" diameter x 23.8" width
RPM:	1,080	–
Knife Pockets:	4	4
Knives (thickness x width x length):	.625" thick x 5.5" wide x 9" long	–
DISCHARGE		
Swivel:	360°	360°
Deflector:	Manual	Manual
TANKS		
Fuel Tank Capacity:	25 Gallon	32 Gallon
Hydraulic Tank Capacity:	12 Gallon	12 Gallon

BANDIT OFFERS A COMPLETE LINE OF TREE CARE EQUIPMENT:

- Hand-Fed Chippers • Stump Grinders • Whole Tree Chippers
 The Beast® Horizontal Grinders • Track Carriers • Attachments