COMPARISON


Intimidator 15XP > Morbark 1821

THE BANDIT 15XP HAS A 37" DIAMETER DRUM

compared to the Morbark 30" diameter drum. The drum on the 15XP turns at 1,087 RPM compared to the Morbark drum turning at a faster RPM. A lower RPM drum delivers more torque, requires less horsepower, operates with less vibration and provides better fuel economy

THE BANDIT SLIDE BOX FEED SYSTEM

allows the top feed wheel to move straight up and down, providing direct down pressure on material entering the chipper using down pressure springs and the standard hydraulic lift cylinder. Whereas, the Morbark pivot arm system utilizes a pivoting top feed wheel that moves up and down on an arc away from the chipping drum. There is little direct down pressure, limiting pulling and compressing power causing more chainsaw work and decreased production.

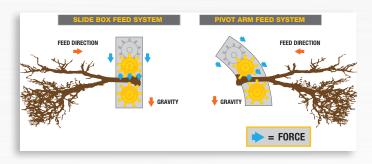

BANDIT DRUMS WARRANTY

All Bandit drums are built to be extremely durable and feature numerous internal baffles and reinforced knife pockets. These drums provide years of dependable service and are backed by an industry best 5 year "GUTS" warranty covering the drums fabricated components. Also covered under this warranty is the feed systems fabricated components.









6750 MILLBROOK ROAD **REMUS, MICHIGAN 49340** 1-800-952-0178 WWW.BANDITCHIPPERS.COM







MANUFACTURER:	BANDIT	MORBARK
Configuration:	Intimidator™ 15XP	1821
	MEASUREMENTS	
Capacity:	15" diameter	15" diameter
Throat Opening:	18.25" wide x 17.75" tall	20.5" wide x 18" tall
Feed Rate (FPM):	120 FPM	100 FPM
	DIMENSIONS	
Length (tray open):	17' 8"	18' 8"
Width:	6' 6"	7' 4"
Height:	8' 8"	8' 8"
Weight:	8,000 lbs.	8,900 lbs.
	ENGINE	
Horsepower Range:	120 – 174 HP	140 – 174 HP
CHASSIS		
Frame:	.25" x 4" Tubing	2" x 6" channel
Suspension:	10,000 lbs.	9,000 lbs.
Hitch:	2.5" Pintle	steel
Tires/Tracks:	(2) 215/75R 17.5" Tires	2.5" Pintle
Tongue Jack:	8,000 lbs.	(1) 9,000 lb. Axle
Tires/Tracks:	(2) 215/75R 17.5" Tires	(2) 235/75R x 17.5" Tires
Tongue Jack:	8,000 lbs.	10,000 lbs.
	FEED SYSTEM	
Туре:	Slide Box	Pivot Arm
Down Pressure Springs:	(2) 21" Adjustable Springs / Standard Lift Cylinder	-
Feed Wheels:	(2) Horizontal	(2) Horizontal
Number of Hydraulic Motors:	2	2
Displacement (CID):	32.3	32.3
Infeed Hopper Dimensions:	30.75" high x 54" wide	41" high x 59" wide
Bottom Clean Out Door:	Standard	-

MANUFACTURER:	BANDIT	MORBARK	
Configuration:	Intimidator™ 15XP	1821	
CUTTING SYSTEM			
Style:	Drum	Drum	
Disc/Drum Dimensions:	37" diameter x 18.75" width	30" diameter x 23.8" width	
RPM:	1,080	-	
Knife Pockets:	4	4	
Knives (thickness x width x length):	.625" thick x 5.5" wide x 9" long	-	
DISCHARGE			
Swivel:	360°	360°	
Deflector:	Manual	Manual	
TANKS			
Fuel Tank Capacity:	25 Gallon	32 Gallon	
Hydraulic Tank Capacity:	12 Gallon	12 Gallon	