


# COMPARISON

*Intimidator 19XPC > Morbark 1922 & 2131*

## THE BANDIT SLIDE BOX FEED SYSTEM

allows the top feed wheel to move straight up and down, providing direct down pressure on material entering the chipper using down pressure springs and the standard hydraulic lift cylinder. Whereas, the Morbark pivot arm system utilizes a pivoting top feed wheel that moves up and down on an arc away from the chipping drum. There is little direct down pressure, limiting pulling and compressing power causing more chainsaw work and decreased production.

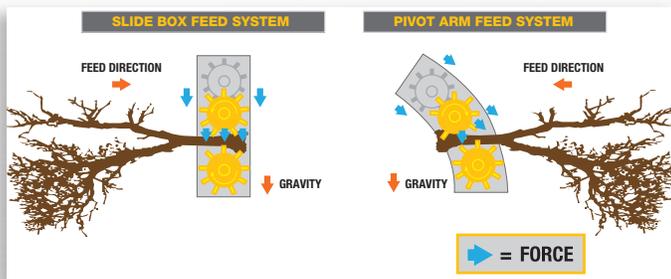

## THE INTIMIDATOR 19XPC

has greater pulling and compressing power compared to the Morbark 1922 and 2131. Combined, the 19XPC generates around 10,824 pounds of pulling power reducing the need to trim and reposition material into the chipper. Morbark lists their units as having 7,500 lb/ft of pulling power.

## BANDIT DRUMS WARRANTY

All Bandit drums are built to be extremely durable and feature numerous internal baffles and reinforced knife pockets. These drums provide years of dependable service and are backed by an industry best 5 year "GUTS" warranty covering the drums fabricated components. Also covered under this warranty is the feed systems fabricated components.



1922



2131



6750 MILLBROOK ROAD  
REMUS, MICHIGAN 49340

1-800-952-0178

WWW.BANDITCHIPPERS.COM



All specifications, dimensions and options are subject to change without notice, and were current at the time of printing. Dimensions may vary, depending on options and engines selected. Bandit Industries, Inc. reserves the right to change designs, specifications and options without prior notice. © 2022 Bandit Industries, Inc. All Rights Reserved.

**CALL YOUR LOCAL BANDIT SALES REPRESENTATIVE TO SCHEDULE A DEMONSTRATION TODAY!**

MANUFACTURER:	BANDIT	MORBARK 1922	MORBARK 2131
<b>MEASUREMENTS</b>			
Capacity:	19" diameter	18" diameter	18" diameter
Throat Opening:	20.5" wide x 20.875" tall	19" wide x 21.3" tall	20.5" wide x 31" tall
Feed Rate (FPM):	100 FPM	100 FPM	100 FPM
<b>DIMENSIONS</b>			
Length (tray open):	20' 3"	18' 3"	21' 2"
Width:	7' 7"	7' 8"	7' 8"
Height:	8' 6"	9' 4"	9' 6"
Weight:	9,800 -11,500 lbs.	9,550 – 11,500 lbs.	11,000 lbs.
<b>ENGINE</b>			
Horsepower Range:	165 – 225 HP	165 – 174 HP	140 – 275 HP
<b>CHASSIS</b>			
Frame:	2" x 6"	6" channel	6" channel
Suspension:	12,000 lbs.	10,000 lbs.	10,000 lbs.
Fenders:	Aluminum or steel	Steel	Steel
Hitch:	2.5" Pintle	2.5" Pintle	2.5" Pintle
Axle/ Undercarriage:	(1) 12,000 lb. Axle	(1) 10,000 lb. Torflex Axle	(1) 10,000 lb. Torflex Axle
Tires/Tracks:	(2) 235/75R 17.5" Tires	(2) 235/75R x 17.5" Tires	(2) 235/75R x 17.5" Tires
Tongue Jack:	8,000 lbs.	10,000 lbs.	10,000 lbs.
<b>DISCHARGE</b>			
Swivel:	345°	360°	360°
Deflector:	Manual	Manual	Manual
<b>TANKS</b>			
Fuel Tank Capacity:	30 Gallon	44 Gallon	60 Gallon
Hydraulic Tank Capacity:	30 Gallon	26 Gallon	41 Gallon

MANUFACTURER:	BANDIT	MORBARK 1922	MORBARK 2131
<b>FEED SYSTEM</b>			
Type:	Slide Box	Pivot Arm	Pivot Arm
Down Pressure Springs:	(2) 21" Adjustable Springs	-	-
Feed Wheels:	(2) Horizontal	(2) Horizontal	(2) Horizontal
Number of Hydraulic Motors:	2	2	2
Displacement (CID):	63.9	-	-
Infeed Hopper Dimensions:	33.75" high x 64" wide	36" high x 59" wide	38" high x 59" wide
Bottom Clean Out Door:	Standard	-	-
<b>CUTTING SYSTEM</b>			
Style:	Drum	Drum	Drum
Disc/Drum Dimensions:	37" diameter x 22" width	37.5" diameter x 23.5" width	37.5" diameter x 23.5" width
RPM:	1,080	-	-
Knife Pockets:	4	4	4
Knives (thickness x width x length):	.625" thick x 5.5" wide x 10" long	.625" thick x 5.5" wide x 10" long	.625" thick x 5.5" wide x 10" long

**BANDIT OFFERS A COMPLETE LINE OF TREE CARE EQUIPMENT:**  
 Hand-Fed Chippers • Stump Grinders • Whole Tree Chippers  
 The Beast® Horizontal Grinders • Track Carriers • Attachments