


COMPARISON

Bandit 90XP > VERMEER BC900XL

THE BANDIT SLIDE BOX FEED SYSTEM

allows the top feed wheel to move straight up and down, providing direct down pressure on material entering the chipper using down pressure springs and the standard hydraulic lift cylinder reducing the need to trim and increasing productivity. Whereas, the Vermeer pivot arm system utilizes a pivoting top feed wheel that moves up and down on an arc away from the chipping drum. There is little direct down pressure, limiting pulling and compressing power causing more chainsaw work and decreased production.

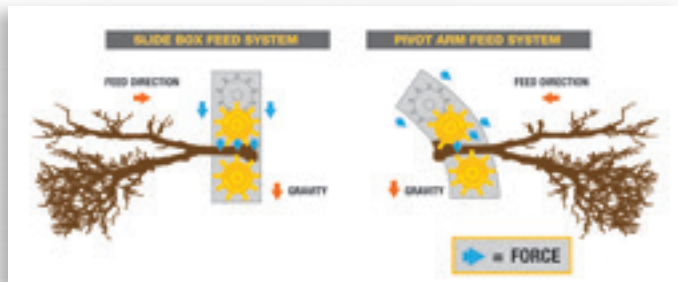

SMOOTH FEEDING

the reversing auto feed system on the 90XP is programmed to work in conjunction with the engines RPM creating a smooth efficient chipping action. The Vermeer Smart Feed is designed to reverse the feed system on a frequent basis creating increased vibration, reduced feeding efficiency and chip quality.



THROAT OPENING

The Bandit 90XP has a 3" wider throat opening allowing it to process material more efficiently.



6750 MILLBROOK ROAD
REMUS, MICHIGAN 49340

1-800-952-0178

WWW.BANDITCHIPPERS.COM



All specifications, dimensions and options are subject to change without notice, and were current at the time of printing. Dimensions may vary, depending on options and engines selected. Bandit Industries, Inc. reserves the right to change designs, specifications and options without prior notice. © 2024 Bandit Industries, Inc. All Rights Reserved.

CALL YOUR LOCAL BANDIT SALES REPRESENTATIVE TO SCHEDULE A DEMONSTRATION TODAY!

MANUFACTURER:	BANDIT	VERMEER
Configuration:	Model 90XP	BC1200XL
MEASUREMENTS		
Capacity:	9" diameter	9" diameter
Throat Opening:	17" wide x 9.5" tall	14" wide x 9" tall
Feed Rate (FPM):	90 FPM	140 FPM
DIMENSIONS		
Length (tray open):	16' 4"	12' 11"
Width:	6'	6' 8"
Height:	8'	8' 1"
Weight:	3,700 – 4,800 lbs.	3,060 lbs.
ENGINE		
Horsepower:	37 – 84 HP	35 HP
CHASSIS		
Frame:	2" x 4"	3/16" x 5 3/16"
Suspension:	6,000 lbs.	3,500 lbs.
Fenders:	Steel	Steel
Hitch:	Pintle or Ball	Pintle or Ball
Axle/Undercarriage:	(1) 6,000 lb. Axle	(1) 3,500 lb. Axle
Tires/Tracks:	(2) 15"	(2) 14"
FEED SYSTEM		
Type:	Slide Box	Pivot Arm
Down Pressure Springs:	(2) Adjustable Springs	Spring
Spring Down Pressure:	440 lbs.	350 lbs.
Hydraulic Down Pressure:	2,200 lbs.	n/a
Feed Wheels:	(2) Horizontal	(1) Horizontal
Number of Hydraulic Motors:	2	1
Displacement (CID):	15.9	33.1
Infeed Hopper Dimensions:	29" high x 45" wide	32" high x 48" wide
Bottom Clean Out Door:	Standard	–

MANUFACTURER:	BANDIT	VERMEER
Configuration:	Model 90XP	BC1200XL
CUTTING SYSTEM		
Style:	Disc	Disc
Disc/Drum Dimensions:	30" diameter x 1.5" thick	33" diameter x 1" thick
RPM:	1,500	1,500
Knife Pockets:	2	2
Knives (thickness x width x length):	.5" thick x 4" wide x 5.125" long	.6" thick x 5" wide x 11.75" long
Chipper Shaft Diameter:	4"	–
Bearings:	2.4375"	–
DISCHARGE		
Swivel:	360°	360°
Deflector:	Adjustable	Adjustable
TANKS		
Fuel Tank Capacity:	24.5 Gallon	16 Gallon
Hydraulic Tank Capacity:	7 Gallon	6.8 Gallon

BANDIT OFFERS A COMPLETE LINE OF TREE CARE EQUIPMENT:

Hand-Fed Chippers • Stump Grinders • Whole Tree Chippers
 The Beast® Horizontal Grinders • Track Carriers • Attachments